

**CAPACITY** 5500 lbs.

WEIGHT 165 lbs

### WHEELS / TIRES

STEER—STEEL HUB (2)6.9" x 2.4" polyurethane LOAD—STEEL HUB (2)2.9"" x 3.9" polyurethane

#### **HYDRAULICS**

Three position hydraulic lever: Lifting, neutral, and lowering. Variable speed lowering helps reduces product damage. Fully sealed hydraulic pump with hardened chrome plated lifting piston. Handle return spring, returns handle to vertical position for safe operation.

Tapered fork tip with phenolic "pallet" entry wheels. Steel exit rollers with solid pull rods. 2.9" lowered height-allows handling of virtually any pallet. Reinforced C-channel construction helps resist twisting during heavy loads. Durable powder coat paint.

#### WARRANTY

6-months on frame and pump. 90-Days on wheels, axles, bearings and bushings.

#### **OPTIONAL**


Fork Widths: 21"


Fork Lengths: 36" & 42"

# **PT 55**

## **Hand Pallet Jack**

Intra Storage Systems 5555 McFadden Avenue Huntington Beach, CA 92649 714-895-5128 info@intrastoragesystems.com

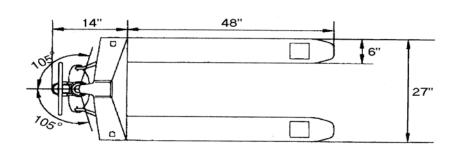

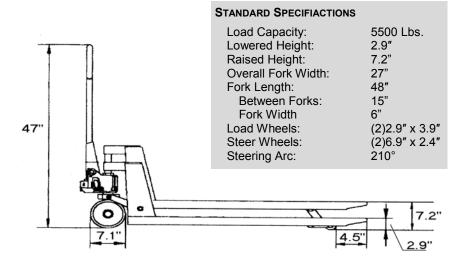

Not...Your ...Average...Joe